


Fire-resistant extra heavy-duty lock.

This highly versatile, extra heavy-duty lock case, certified to BS476, is intended for use in fire-resistant steel doors and is designed to take both oval and euro-profile cylinders. The lock case dimensions are according to DIN 18251

Application	Modular, extra heavy duty lock range, especially suitable for frequently used entrance - and inner doors, with high risk of abuse, e.g. public buildings
Specification	<ul style="list-style-type: none">• For European and oval cylinder.• 4 Hours fire-resistant according to BS 476, part 22, 1997, clause 8.• Zinc-plated steel, white lacquered lock case.• Key action on latch bolt.• Double throw dead bolt.• Easily reversible latch bolt.• Backset 60 mm.• Distance 72 mm (bath/wc 78 mm).• Removable forend stainless steel square (20 x 235 mm).• Steel nickel-plated bolts.• Inclusive stainless steel strike plate and zinc-plated screws.
Functions	<ul style="list-style-type: none">• 6102 = mortise panic lock with splitted 8 mm steel follower.• 6104 = mortise bathroom/wc lock.• 6105 = mortise latch.• 6106 = mortise night latch with hold back function.• 6107 = mortise night latch.• 6108 = mortise dead lock.• 6109 = mortise sash lock.
Guarantee	Two years.



Standards: EN 12209 and EN 179 (for panic lock)

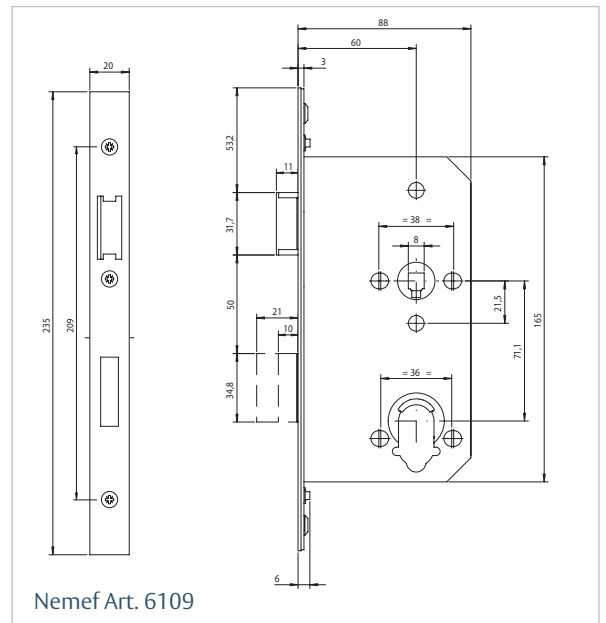

Nemeff Art. 6109

6100 Series.



ASSA ABLOY